



LOGICcell

Get it charged, get it started.

DESCRIPTION

The LOGICcell is a rechargeable battery pack that provides mobility of usage, design and function to office furniture. The corresponding docking bay enables the possibility of easy installation and exchange. Charging is performed by using a standard Micro USB Charger.

FEATURES

- Charging with standard Micro USB charger
- Compatible with SMARTneo-pro
- Docking bay for easy mounting and exchange
- LEDbar and buzzer for indicating status





Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 1525 Gezon Parkway SW,
Suite C Grand Rapids, MI 49509, USA, office.na@logicdata.net

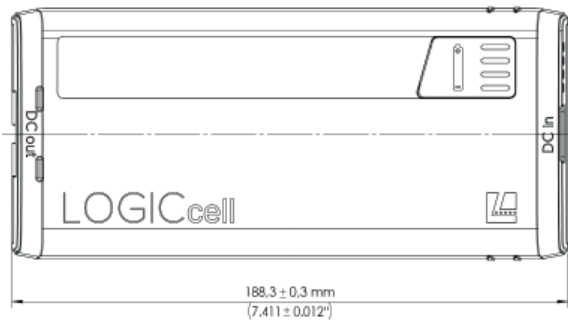

TECHNICAL DATA

Rated output current	10 A
Rated output voltage	25.2 VDC
Rated. input current	2.4 A
Max. input voltage	5 VDC
Service life*	500 cycles
Dimensions (l x w x h)	188.3 x 85.4 x 34.2 mm
Weight	527.9 g
Interface / connector types	Micro USB type-B
Ambient conditions during operation	+5 °C to +40 °C at 10 % to 85 % relative humidity (non-condensing), with +27 °C max. dew point
Ambient conditions during transport and storage	-20 °C to +60 °C at 5 % to 85 % relative humidity (non-condensing), with +38 °C max. dew point; temperatures from +55 °C to +76 °C only for short periods, not exceeding 24 h
Compatibility	SMARTneo-pro
Degree of protection	IP 20
Standards and regulations	EMC directive 2014/30/EU RoHS directive 2011/65/EU REACH Regulation (EC) No 1907/2006 WEEE directive 2012/19/EU Batteries directive 2006/66/EC AfPS GS:2014:01 California proposition 65 Dodd Frank Act UL 2054 UN-T 38.3
Order code	LOGICcell-A1
Used cells	Li-Ion battery INR18650 M26
Capacity	2.6 Ah

* Capacity at the end of the service life is max. 70% of initial value