



SILVERlite

DESCRIPTION

One Bed, One Package. The SILVERlite is the world's first adjustable base to be UPS/FedEx shippable in a single package with no oversize charges. Assembly is possible in just 10 minutes: no tools needed!

Robust, intuitive, and stunningly designed, the SILVERlite offers a perfect blend of safety and comfort: the smooth Head Up and Foot Up motions, wireless compatibility, and pre-set Memory Positions seamlessly complement the 1000 lbs maximum weight limit, Child Lock, and free-fall design to create a dream bed without the sleepless nights.



FEATURES

- Head Up + Foot Up
- Wireless Remote Control with Child Lock
- Control via Bluetooth with the SILVERmotion App
- Pre-defined Memory Positions (Anti Snore & Zero Gravity)
- 1,000 lbs. Maximum weight limit
- UPS/FedEx-shippable
- From box to bed in 10 minutes
- Wireless Sync of two Twin XL bases for Split King
- Free-fall design
- Emergency lowering
- 10-year limited warranty
- LED Underbed Light (optional)
- USB ports (optional)
- Available sizes: Twin XL, Queen, King, Cal. King, Split King

Contact Headquarters


LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 1525 Gezon Parkway SW,
Suite C Grand Rapids, MI 49509, USA, office.na@logicdata.net



www.logicdata.net

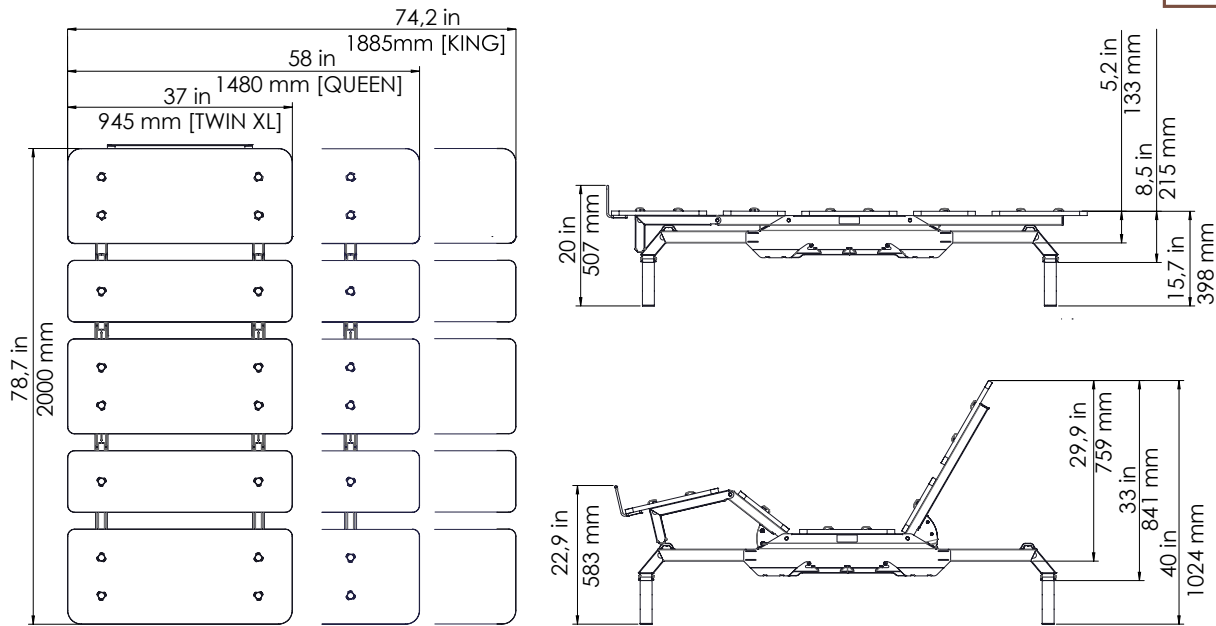

TECHNICAL DATA

Input voltage	100-240 VAC		
Rated input current	2.2 A		
Standby power	1.8 W		
Lifetime durability	7,500 cycles		
Ambient conditions (operation)	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m		
Ambient conditions (transport/storage)	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications		
Max. load (including mattress)*	1000 lbs (454 kg)		
Wireless working frequency	2,4 GHz		
IP Protection (IEC 60529)	IP20		
Applicable standards	RoHS 2011/65/EU UL 962 FCC CFR 47 Part 15 Subpart B/C California proposition 65 Dodd-Frank Wall Street Reform and Consumer Protection Act		
Immunity to ESD interference (EN 61000-6-2)	Conducted discharge: level 4 8kV Air discharge: level 4 15kV		
Bed size	King**	Queen	Twin XL
Recommended Mattress Size (l x w)	2032 x 1930.4 mm 80 " x 76 "	2032 x 1524 mm 80 " x 60 "	2032 x 990,6 mm 80 " x 39 "
Bed Dimensions (l x w x h)	78.74 " x 74.21 " x 15.7 " 2000 x 1885 x 398 mm	78.74 " x 58.27 " x 15.7 " 2000 x 1480 x 398 mm	78.74 " x 37.20 " x 15.7 " 2000 x 945 x 398 mm
Package dimensions (l x w x h)	75.87 " x 17.52 " x 7.87 " 1927 x 445 x 200 mm	75.87 " x 17.52 " x 7.87 " 1927 x 445 x 200 mm	75.87 " x 17.52 " x 6.46 " 1927 x 445 x 164 mm
Package Weight	162.04 lbs 73.5 kg	143.30 lbs 65 kg	119.05 lbs 54 kg
Order code	SFS-LIT-KNG-LDS-A	SFS-LIT-QEN-LDS-A	SFS-LIT-TXL-LDS-A

* Max. Load may vary depending on Input Voltage

**Technical Data for California King and other Bed Sizes available on Request