



SILVERstandard+

The new standard for adjustables.

DESCRIPTION

The SILVERstandard Adjustable Base unifies innovation, functionality and design in one single system. The motion-giving core technology is entirely integrated into the side rails and was created to be extraordinarily easy assembled through a modularity-based model. Disassembly is just as simple, making it a convenient piece of furniture to transport when moving rooms or houses. The Frame Control allows for state-of-the-art up and down movement of the head and foot sections, including the most efficient wall keeping mechanism on the market.



FEATURES


- Easy to ship with UPS or FedEx
- Easy to assemble and disassemble by one person
- Head Up, Foot Up and Nightstand Reach functionality
- Hidden technology
- Customizable component design
- Underbed light
- Vibration Massage
- Wireless Sync for Split King
- Two USB ports
- Zero clearance design
- Free fall-design

Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 1525 Gezon Parkway SW,
Suite C Grand Rapids, MI 49509, USA, office.na@logicdata.net

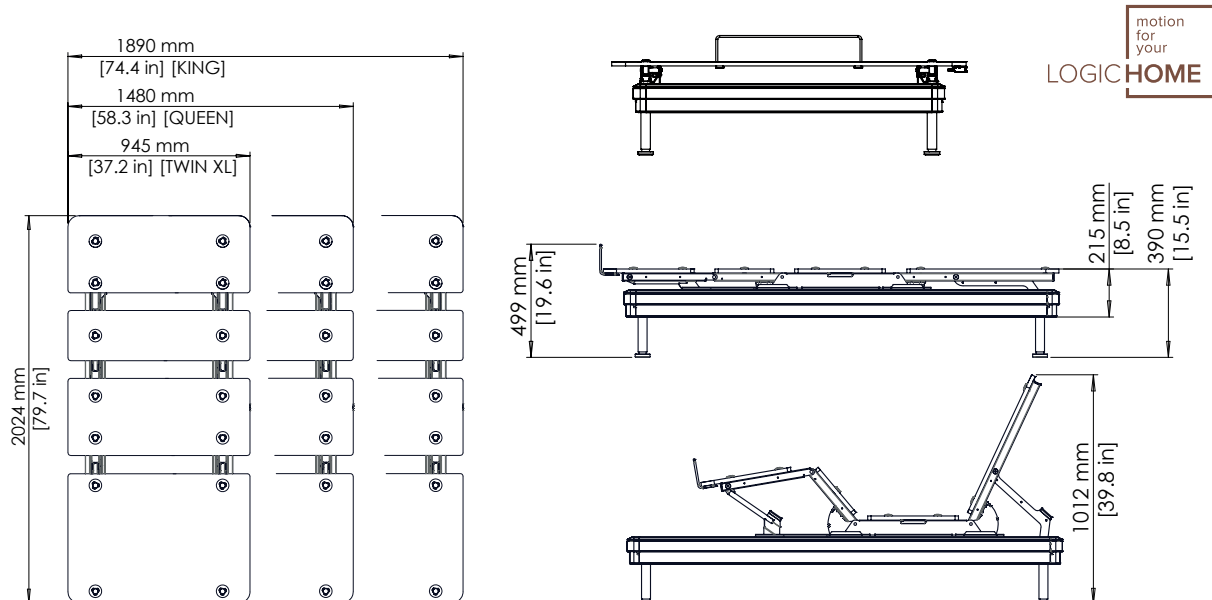

TECHNICAL DATA

Input voltage	100-240 VAC		
Rated input current	2.2 A		
Standby power	1.8 W		
Lifetime durability	7,500 cycles		
Ambient conditions (operation)	+5 °C to +40 °C at 10% to 95 % relative humidity (non-condensing), with +27°C max dew point		
Ambient conditions (transport/ storage)	-35 °C to +85°C at 10% to 95% relative humidity (non-condensing), with +38 °C max dew point. +55 °C to +85 °C for periods not exceeding 72h		
Max load	700 lbs (315 kg)		
Wireless working frequency	2.4 GHz		
IP Protection Degree (IEC 60529)	IP20		
Applicable standards	RoHS 2011/65/EU UL 962 FCC CFR 47 Part 15 Subpart B/C California proposition 65 Dodd-Frank Wall Street Reform and Consumer Protection Act		
Immunity to ESD interference (EN 61000-6-2)	Conducted discharge: level 4 8kV Air discharge: level 4 15kV		
Bed size	Queen	King	Twin XL
Dimensions (l x w x h)	79.7" x 58.3" x 15.5" 2024 x 1480 x 390 mm	79.7" x 74.4" x 15.5" 2024 x 1890 x 390 mm	79.7" x 37.2" x 15.5" 2024 x 945 x 390 mm
Frame height (without legs)	8.5" (215 mm)	8.5" (215 mm)	8.5" (215 mm)
Weight	176.8 lbs (80.2 kg)	211.6 lbs (96.0 kg)	151.2 lbs (68.6 kg)
Platform package size	60.2" x 28.3" x 6.3" 1530 x 720 x 160 mm	76.4" x 28.3" x 6.7" 1940 x 720 x 170 mm	39.4" x 28.3" x 6.3" 1000 x 720 x 160 mm
Platform package weight	101.9 lbs (46.2 kg)	136.7 lbs (62 kg)	76.3 lbs (34.6 kg)
Side Rail package size	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm
Side Rail package weight	93 lbs (42.2 kg)	93 lbs (42.2 kg)	93 lbs (42.2 kg)
Order code	SFS-HFW-QEN-LDS-MAS	SFS-HFW-KNG-LDS-MAS	SFS-HFW-TXL-LDS-MAS