DOCUMENT VERSION 2.0 | DECEMBER 2019

motion for your LOGIC OFFICE

DYNAMIC MOTION **system**

DMUI-EASY2move

Freedom at your fingertips.

DESCRIPTION

Liberation. With the arrival of DMUI-EASY2move, LOGICDATA brings the joy of motion directly to your fingertips. This ultra-responsive user interface is a declaration of our passion for outstanding ergonomic design: simple, effective, and beautiful. Premium usability forms the core of the DMUI-EASY2move philosophy. The is compatible withLOGICDATA's DYNAMIC MOTION system, making it the perfect addition to the most exciting range of mechatronic furniture components on the market today.

FEATURES

- Stunning ergonomic design
- Intuitive up / down motion control
- LED display for system information
- Under-desk mounting
- Dedicated Save Button

Contact Headquarters
LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America
LOGICDATA North America Inc., 5300 Broadmoor Ave SE,
Suite D, Grand Rapids, MI 49512, USA, office.na@logicdata.net

LOGICDATA MOTION FOR YOUR LIFE

www.logicdata.net

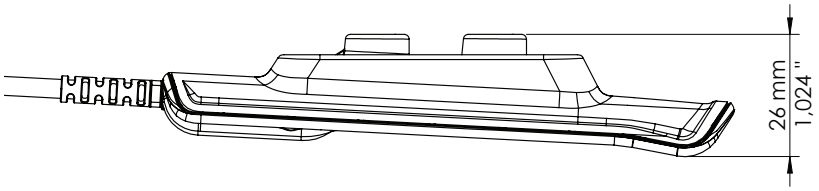



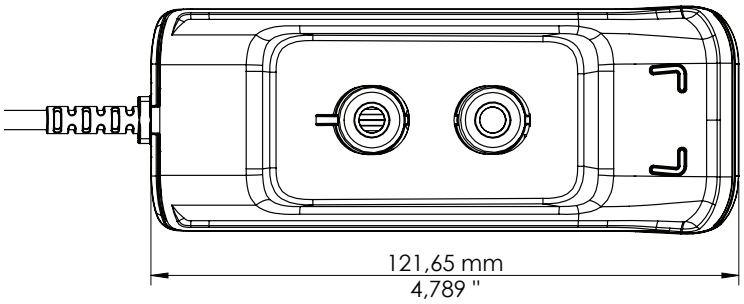

TECHNICAL DATA

Supply voltage	28.5 V DC
Current Consumption (average)	5 mA
Current Consumption (standby)	<5uA
Cable length	1 800 mm / 70.866 " (± 50 mm / 1.967 ")
Dimensions* (l x w x h)**	121.65 mm × 47.22 mm × 26.00 mm / 4.789 " x .1.859 " x 1.024 "
Weight	108 g
Ambient conditions during operation	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
Ambient conditions during transport and storage	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
Compatibility	Part of the DYNAMIC MOTION System
Degree of protection (IEC 60529)	IP 20
Standards and regulations	EMC directive 2014/30/EU RoHS directive 2011/65/EU Dodd Frank Act Section 1502
Order Code	**DMUI-EASY2move-B-x-y**

Cable type, standard is blank, "TPE" for PVC-free variant
Customer Code, up to 3 characters, standard is "LD"

* Distance between Mounting Points: 25 mm
**Height measured Contact Point to Mounting Point