







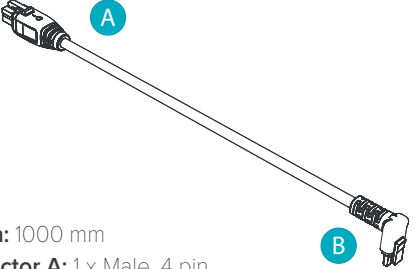
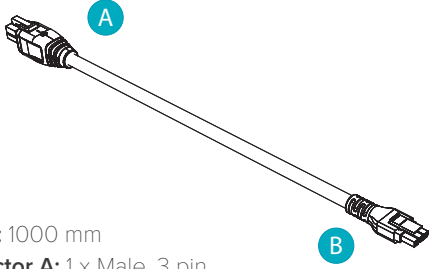


# CABLES: DYNAMIC MOTION system

## CONNECTOR TYPES

DYNAMIC MOTION standard	DYNAMIC MOTION motor	DYNAMIC MOTION accessory	EXTERNAL SENSOR adapter
 <p>Connector Type: Male 4-Pin Connects to: Power</p>	 <p>Connector Type: Male 3-Pin Straight Connects to: Actuators</p>	 <p>Connector Type: Male 10-Pin Connects to: LOGICLink</p>	 <p>Connector Type: Male 3-Pin Connects to: Actuator</p>
 <p>Connector Type: Female 4-Pin Connects to: Male 4 Pin</p>	 <p>Connector Type: Male 3-Pin 90° Cranked Connects to: Actuators</p>	 <p>Connector Type: Male 10-Pin Connects to: LOGICcell</p>	 <p>Connector Type: Female 4-Pin (RJ) Connects to: LOG-PRT-DMS</p>

## CABLES

DMLIN-ACR-1000	DMLIN-AST-1000
 <p>Length: 1000 mm  <b>Connector A:</b> 1 x Male, 4 pin  <b>Connector B:</b> 1 x Male, 3 pin, 90° Cranked  <b>Application:</b> Power Hub to Actuator</p>	 <p>Length: 1000 mm  <b>Connector A:</b> 1 x Male, 3 pin  <b>Connector B:</b> 1 x Male, 4 pin  <b>Application:</b> Power Hub to Actuator</p>


### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
 Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

### North America

LOGICDATA North America, Inc.  
 Broadmoor Ave SE, Suite D Grand Rapids MI, USA, [office.na@logicdata.net](mailto:office.na@logicdata.net)

### DMLIN-AST-SR-1000

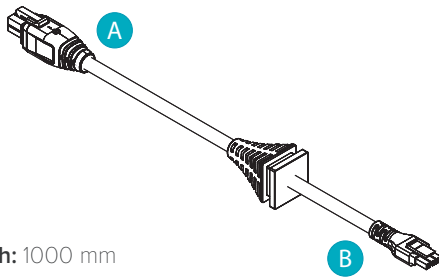


**Length:** 1000 mm

**Connector A:** 1 x Male, 3 pin

**Connector B:** 1 x Male, 4 pin

**Application:** Power Hub to Actuator

### DMLIN-EXT-1000

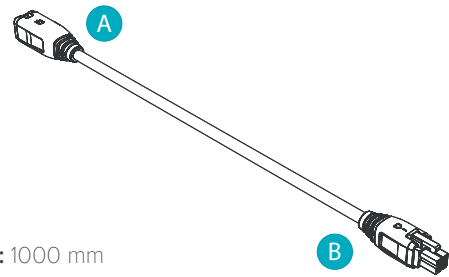


**Length:** 1000 mm

**Connector A:** 1 x Female 4 pin

**Connector B:** 1 x Male 4 pin

**Application:** Extension Cable

### DMLIN-DMS-100

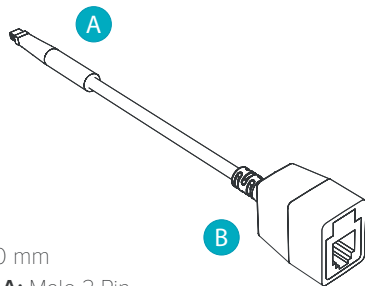


**Length:** 100 mm

**Connector A:** Male 3 Pin

**Connector B:** Female 4 Pin

**Application:** DMS Sensor Adapter Cable

### DMC-LL-1800

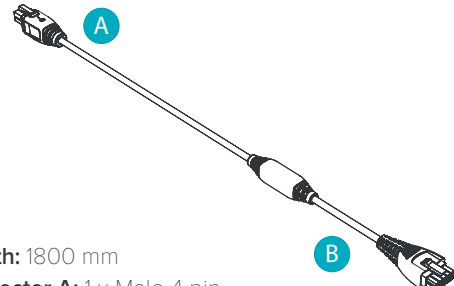


**Length:** 1800 mm

**Connector A:** 1 x Male 4 pin

**Connector B:** 1 x Male 10 pin

**Application:** Power Hub to Connectivity Hub

### DMC-BR-200




**Length:** 200 mm

**Connector A:** 1 x Male 4 pin

**Connector B:** 2 x Female 4 pin

**Application:** Branch Cable

### DMC-BA-2500

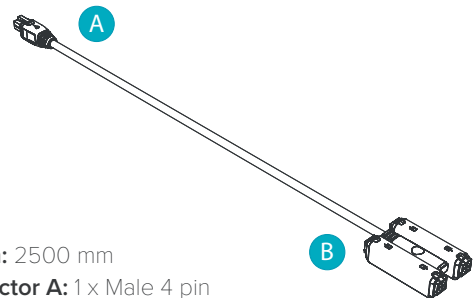


**Length:** 2500 mm

**Connector A:** 1 x Male 4 pin

**Connector B:** 4x Female 4 pin

**Application:** Benching Application Cable

### DMC-CA-1000

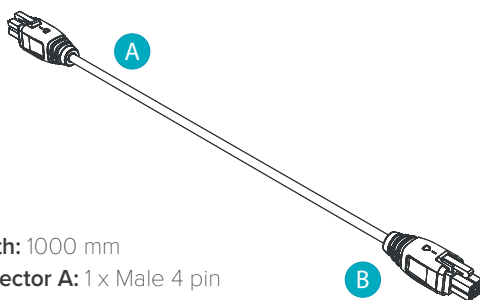


**Length:** 1000 mm

**Connector A:** 1 x Male 4 pin

**Connector B:** 1 x Male 4 pin

**Application:** Conference Application Cable

### DMC-LC-1200

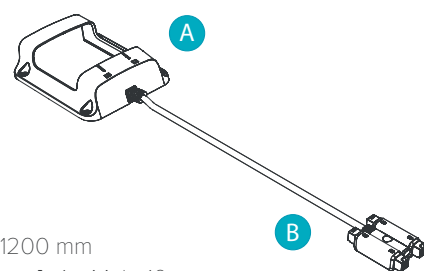

**Length:** 1200 mm

**Connector A:** 1 x Male 10 pin

**Connector B:** 4x Female 4 pin

**Application:** Adapter Cable for Battery Packs