



DYNAMIC MOTION **system**  
**DMP360**  
**The Power Player.**

## DESCRIPTION

Electrifying. With a prodigious 360 W rated output providing the muscle behind the smallest Power Hub for 4-leg table systems on the market today, the DMP360 is a perfect blend of substance and style. The Power Hub's immense lifting capacity can also be applied to heavy and oversized conference tables, providing safe, reliable motion to a vast range of applications.

## FEATURES

- Ideal solution for three and four leg tables
- Compatibility with bench and conference applications
- Protection against overheating and overvoltage

## TECHNICAL DATA


- 360 W output power
- Output connections for up to 5 DYNAMIC MOTION system components
- Tested and certified on US and EU mains supplies

### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

### North America

LOGICDATA North America Inc., 5300 Broadmoor Ave SE,  
Suite D, Grand Rapids, MI 49512, USA, [office.na@logicdata.net](mailto:office.na@logicdata.net)

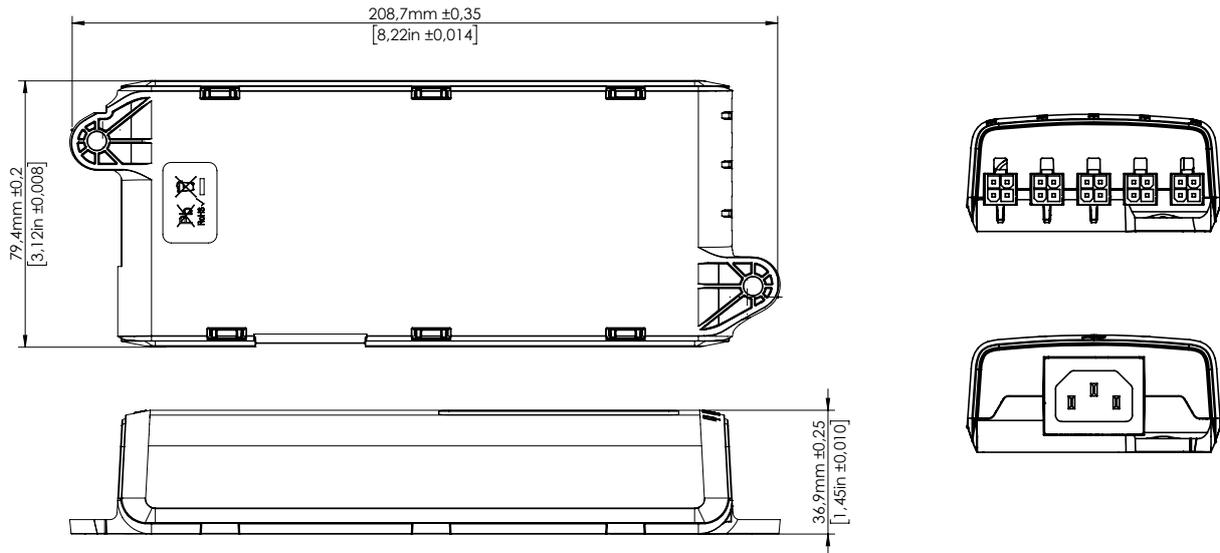

## TECHNICAL DATA

<b>Rated input current</b>	6 A
<b>Rated frequency</b>	50-60 Hz
<b>Rated supply voltage</b>	100-120 VAC
<b>Rated output power</b>	360 W
<b>Standby power consumption</b>	0.3 W
<b>Duty cycle</b>	2 Min. ON (180 W) / 18 Min. OFF or 0.5 Min. (360 W), 0.5 Min (180 W) / 9 Min. OFF
<b>Dimensions (l x w x h )</b>	208.7 mm x 79.4 mm x 36.9 mm (8.22 " x 3.12 " x 1.45 ")
<b>Ambient conditions during operation</b>	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
<b>Ambient conditions during transport and storage</b>	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than +40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
<b>Combatibility</b>	Part of the DYNAMIC MOTION system
<b>Degree of protection (IEC 60529)</b>	IP 20
<b>Applicable standards</b>	<b>FCC Title 47 subpart 15 unintended radiator</b>   ICES-003 Information Technology Equipment   <b>Dodd Frank Act</b>
<b>Interference immunity to ESD (EN 61000-6-2)</b>	Contact discharge 4kV Air discharge 8kV
<b>Order code</b>	DMP360-US

