




# SILVERlite

## DESCRIPTION

One Bed, One Package. The SILVERlite is the world's first adjustable base to be UPS/FedEx shippable in a single package with no oversize charges. Assembly is possible in in just 10 minutes: no tools needed!

Robust, intuitive, and stunningly designed, the SILVERlite offers a perfect blend of safety and comfort: the smooth Head Up and Foot Up motions, wireless compatibility, and pre-set Memory Positions seamlessly complement the 1,000 lbs. maximum weight limit, Child Lock, and free-fall design to create a dream bed without the sleepless nights.

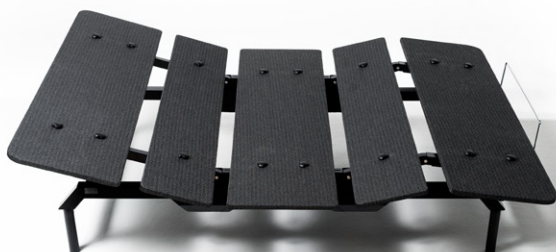

## FEATURES





- Head Up & Foot Up
- Wireless Remote Control with Child Lock
- Pre-defined Memory Positions  
(Anti Snore & Zero Gravity)
- 1,000 lbs. maximum load
- UPS/FedEx-shippable
- Box to bed in 10 minutes
- Wireless Sync of two Twin XL bases  
for Split King
- Free-fall design
- Emergency lowering
- 10-year limited warranty
- Available sizes: Twin XL, Queen, King,  
California King, Split King

### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

### North America

LOGICDATA North America Inc., 5300 Broadmoor Ave SE,  
Suite D, Grand Rapids, MI 49512, USA, [office.at@logicdata.net](mailto:office.at@logicdata.net)

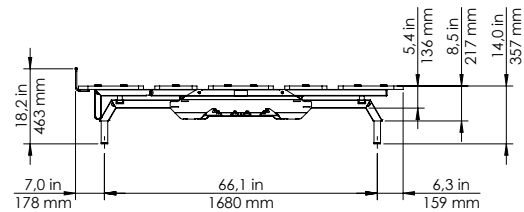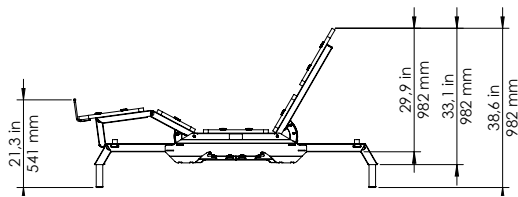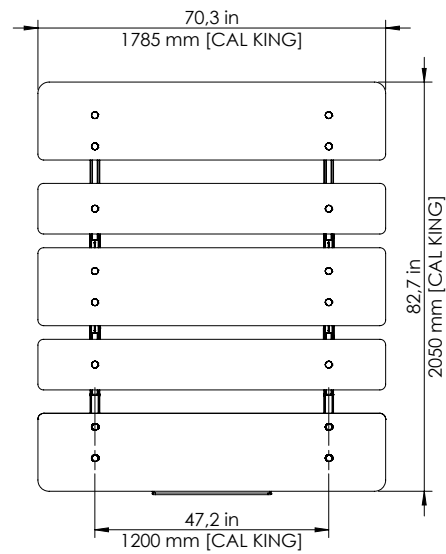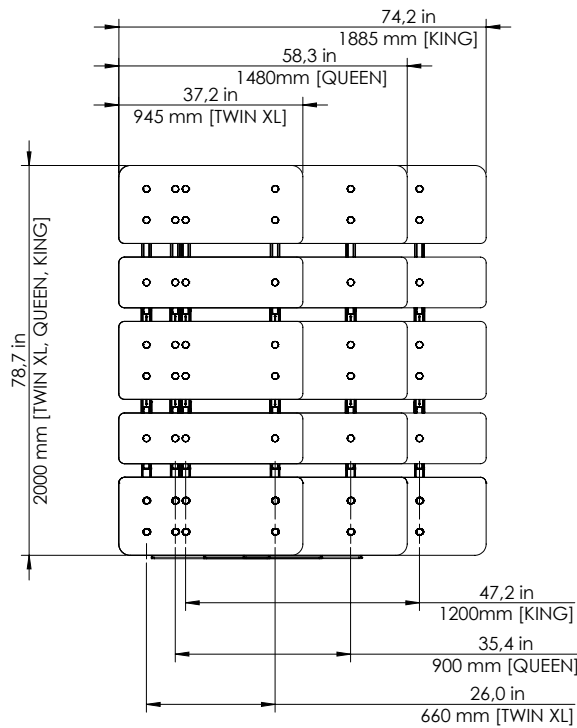

## TECHNICAL DATA

<b>Input voltage</b>	100-240 VAC
<b>Rated input current</b>	2.2 A
<b>Standby power consumption</b>	1.8 W
<b>Lifetime durability</b>	7,500 cycles
<b>Ambient conditions (operation)</b>	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m
<b>Ambient conditions (transport/storage)</b>	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications
<b>Max. load (including mattress)*</b>	1000 lbs (454 kg)
<b>Wireless working frequency</b>	2,4 GHz
<b>IP Protection (IEC 60529)</b>	IP20
<b>Applicable standards</b>	RoHS 2011/65/EU   UL 962   FCC CFR 47 Part 15 Subpart B/C   Dodd-Frank Wall Street Reform and Consumer Protection Act
<b>Immunity to ESD interference (EN 61000-6-2)</b>	Conducted discharge: level 4   8kV Air discharge: level 4   15kV

\* Max. Load may vary depending on Input Voltage

## WEIGHTS AND DIMENSIONS

Bed size	King
Recommended Mattress Size (l x w)	2032 x 1930.4 mm (80 " x 76 ")
Bed Dimensions (l x w x h***)	2000 x 1885 x 357 mm (78.74 " x 74.21 " x 14.1 ")
Package dimensions (l x w x h)	1935 x 453 x 233 mm (76.18 " x 17.83 " x 9.17 ")
Product Weight	69.6 kg (153.5 lbs)
Package Weight	73.4 kg (161.4 lbs)
Order code	SFS-LIT-KNG-LDS-A

Bed size	California King
Recommended Mattress Size (l x w)	2134 x 1829 (84 " x 72 ")
Bed Dimensions (l x w x h***)	2050 x 1785 x 357 mm (82.70 " x 70.30 " x 14.1 ")
Package dimensions (l x w x h)	1930 x 448 x 230 mm (75.99 " x 17.64 " x 9.16 ")
Product Weight	68.4 kg (141.1 lbs)
Package Weight	71.4 kg (157.0 lbs)
Order code	SFS-LIT-CAL-LDS-A

Bed size	Queen
Recommended Mattress Size (l x w)	2032 x 1524 mm (80 " x 60 ")
Bed Dimensions (l x w x h***)	2000 x 1480 x 357 mm (78.74 " x 58.27 " x 14.1 ")
Package dimensions (l x w x h)	1935 x 453 x 233 mm (76.18 " x 17.83 " x 9.17 ")
Product Weight	60.7 kg (133.8 lbs)
Package Weight	64.9 kg (142.8 lbs)
Order code	SFS-LIT-QEN-LDS-A

Bed size	Twin XL
Recommended Mattress Size (l x w)	2032 x 990,6 mm (80 " x 39 ")
Bed Dimensions (l x w x h***)	2000 x 945 x 357 mm (78.74 " x 37.20 " x 14.1 ")
Package dimensions (l x w x h)	1935 x 453 x 192 mm (76.18 " x 17.83 " x 7.56 ")
Product Weight	49.3 kg (108.6 lbs)
Package Weight	53.0 kg (116.6 lbs)
Order code	SFS-LIT-TXL-LDS-A

\*\*\* Height measured from floor to Platform surface (flat position)