



DYNAMIC MOTION system

DMiclassic C

The Legend Returns.

DESCRIPTION

Mythical. With the DMiclassic C's brand-new look and feel complementing its three-digit display and space for up to four saved memory positions, LOGICDATA has added a modern twist to a timeless classic.

FEATURES

- Fully-customizable Hand Control
- Modern Look & Feel
- Soft Touch
- Up to 4 Memory Positions
- Responsive Up / Down Function
- Under-desk mounting
- Sliding mechanism to protect pre-installed handsets during transport


Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 5300 Broadmoor Ave SE,
Suite D, Grand Rapids, MI 49512, USA, office.na@logicdata.net



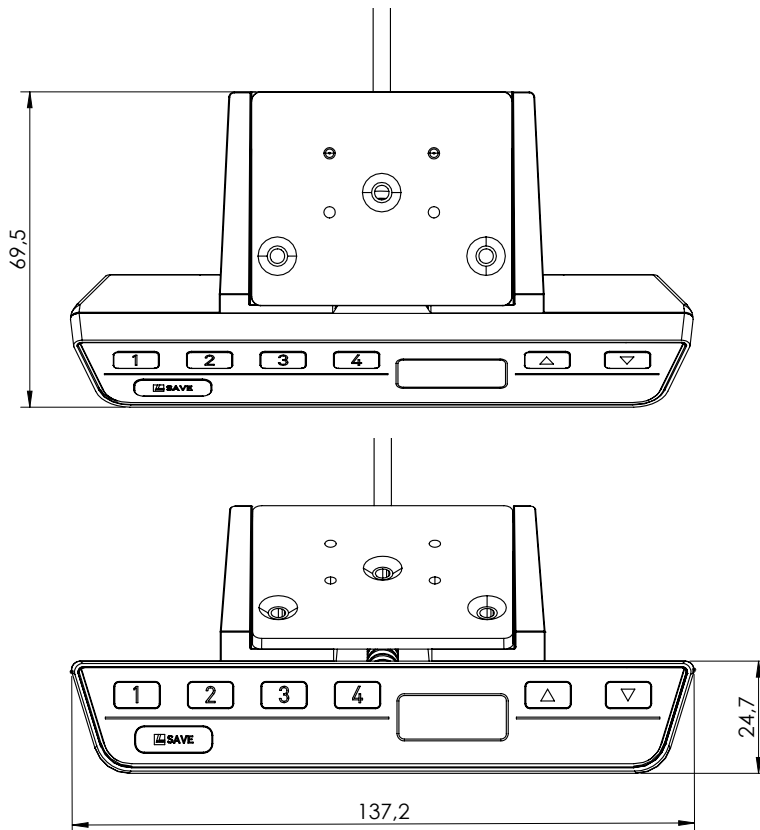

TECHNICAL DATA

Supply voltage	28.5 V DC
Current Consumption (average)	30 mA
Current Consumption (standby)	<0.3 mA
Cable length	1 800 mm / 70.866 " (± 50 mm / 1.967 ")
Dimensions (l x w x h)	69.5 mm x 137.2 mm x 24.7 mm (2.736 " x 5.404 " x 0.974 ")
Ambient conditions during operation	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
Ambient conditions during transport and storage	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
Compatibility	Part of the DYNAMIC MOTION System
Degree of protection (IEC 60529)	IP 20
Standards and regulations	EMC directive 2014/30/EU RoHS directive 2011/65/EU Dodd Frank Act Section 1502
Order Code	DMUI-HSU-C-FL-SM-y-z

Reserved, standard is blank
 Customer Code, up to 3 characters, standard is "LD"