



# CB|classic C

## The Legend Returns.

### DESCRIPTION

**Mythical.** With the CB|classic C's brand-new look and feel complementing its three-digit display and space for up to four saved memory positions, LOGICDATA has added a modern twist to a timeless classic.

### FEATURES

- Fully-customizable Hand Control
- Modern Look & Feel
- Soft Touch
- Up to 4 Memory Positions
- Responsive Up / Down Function
- Under-desk mounting
- Sliding mechanism to protect pre-installed handsets during transport




#### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

#### North America

LOGICDATA North America Inc., 5300 Broadmoor Ave SE,  
Suite D, Grand Rapids, MI 49512, USA, [office.na@logicdata.net](mailto:office.na@logicdata.net)



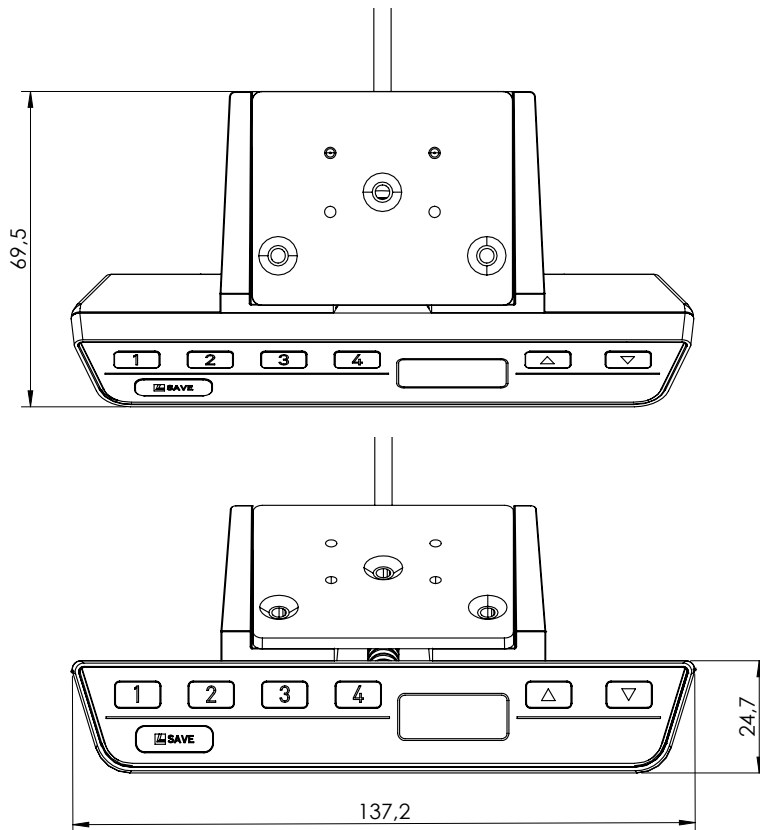

## TECHNICAL DATA

<b>Supply voltage</b>	5 V DC $\pm$ 10%
<b>Current Consumption (average)</b>	75 mA
<b>Cable length</b>	1 800 mm
<b>Dimensions (l x w x h )</b>	69.5 mm x 137.2 mm x 24.7 mm (2.736 " x 5.404 " x 0.974 ")
<b>Ambient conditions during operation</b>	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
<b>Ambient conditions during transport and storage</b>	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to +60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
<b>Compatibility</b>	See Compatibility Table
<b>Degree of protection (IEC 60529)</b>	IP 20
<b>Standards and regulations</b>	EMC directive 2014/30/EU RoHS directive 2011/65/EU
<b>Order Code</b>	<b>HSU-C-FL-SM-y-z</b>

..... Reserved, standard is blank  
..... Customer Code, up to 3 characters, standard is "LD"