



White



Black

# LOGICflex X-US

## The Lively Jetsetter.

## DESCRIPTION

Our lively jetsetter combines a variety of prized assets from the whole family, including cutting-edge DYNAMIC MOTION and ISP technologies. Ultimate protection, performance and outstanding rounded edge design: delivered as standard.

## FEATURES

- Unique leg shaping and design
- Clean, crisp design
- Intelligent System Protection
- 4 integrated sensors
- Brushless motor technology
- Plug & Play technology
- Simple & fast set up
- Compact & e-Commerce designed packaging
- Made in EU


### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

### North America



LOGICDATA North America Inc., 5300 Broadmoor Ave SE,  
Suite D, Grand Rapids, MI 49512, USA, [office.na@logicdata.net](mailto:office.na@logicdata.net)

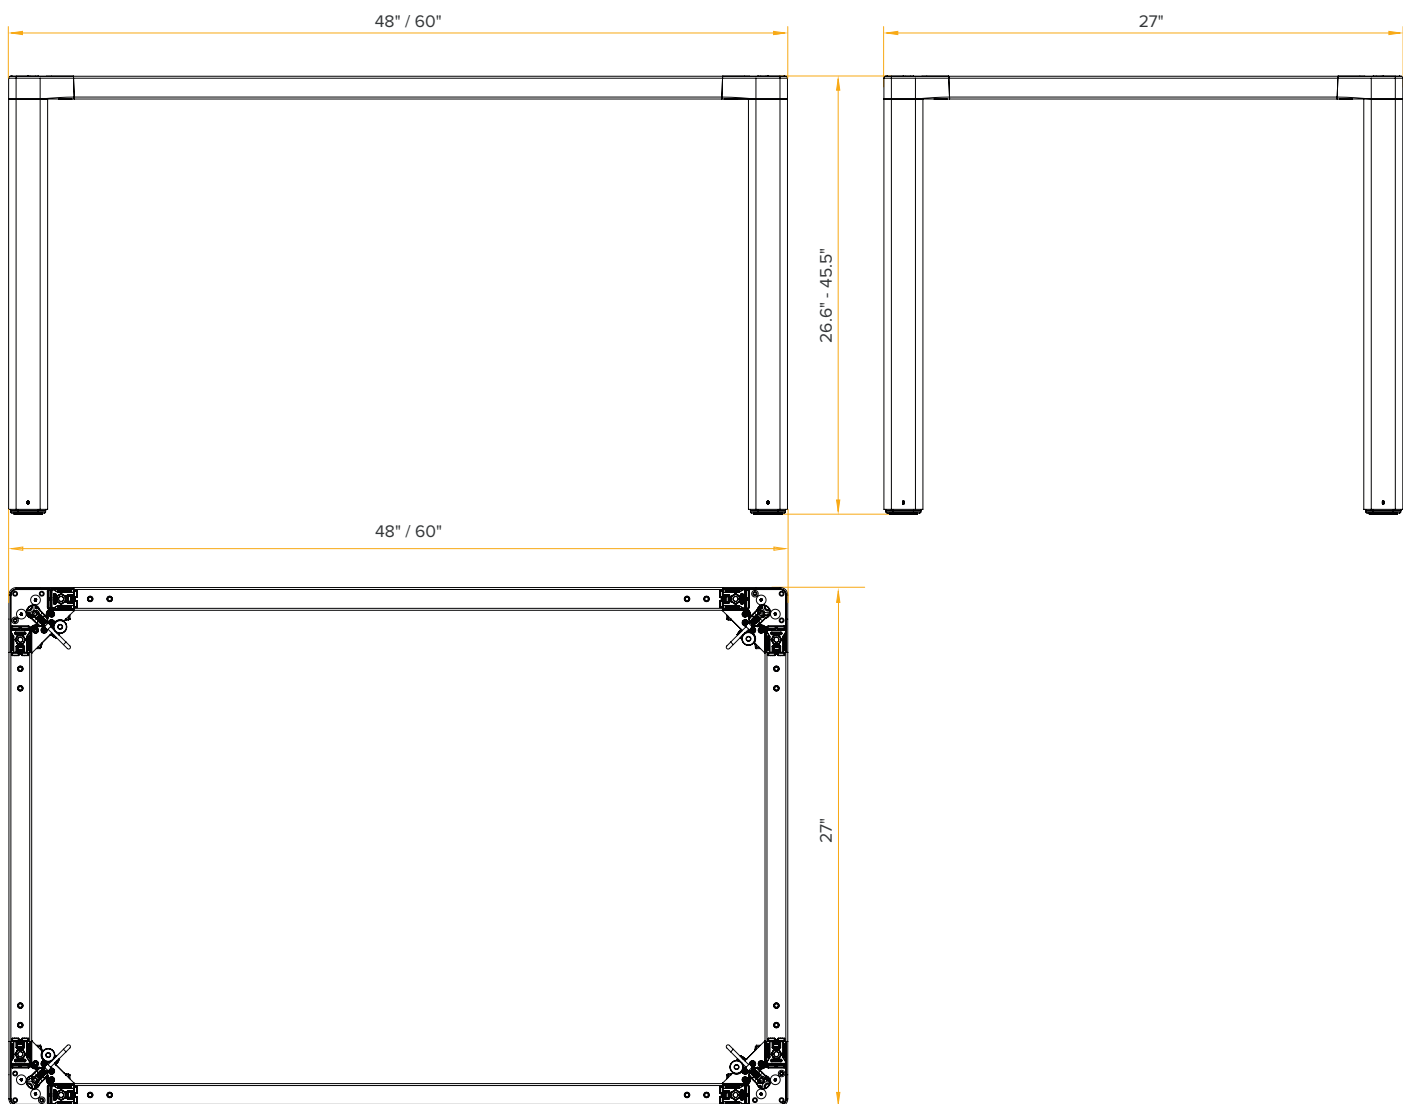



## TECHNICAL DATA

Frame size	60" x 27"   48" x 27"
Travel range (without tabletop)	26.6" ( $\pm 0.5"$ ) to 45.5" ( $\pm 0.5"$ )
Stroke	18.9"
Adjustment speed	1.5"/s (0.95"/s reduced speed)
Lifting capacity (without tabletop)	220 lbs
Max. load	375 lbs*
Input rating	100-120 VAC, 6 A

<b>Duty cycle</b>	2 min. ON / 18 min. OFF
<b>Max. product weight</b>	65 lbs
<b>Max. leg package weight</b>	50.5 lbs
<b>Max. frame package weight</b>	17.6 lbs
<b>Leg package dimensions (inch)</b>	32.5 x 14.2 x 5.3
<b>Frame package dimensions (inch)</b>	59.1 x 5.5 x 2.2   53.9 x 5.5 x 2.2
<b>Available Colors</b>	Black non-structured, White non-structured
<b>Ambient conditions during transport and storage</b>	Temperature between -35°C and 80°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed)
<b>Ambient conditions during operation</b>	+5°C to +40°C at max. 68% relative air humidity (non-condensing), up to an altitude of 2000 m.
<b>Certifications</b>	 <b>US LISTED</b> (E529430)
<b>Applied standards</b>	UL962
<b>Order code</b>	Example: LOGICflex-X1-US-WHT-LDS-oo LOGICflex-Ao-BB-CCC-DDD-oo <div>  </div>

\*Up to 375 lbs with certain configuration