



CBIsolid C

Three Is the Magic Number.

DESCRIPTION

Ultimate. For perfect control over every aspect of adjustability, nothing beats the CBIsolid C. This full-featured Handset can save three table positions and includes an LED system display for an overview of height and system status. The CBIsolid C is designed for performance – under-desk mounting, soft-touch buttons and extreme responsiveness are the hallmarks of its quality.

FEATURES

- Modern Look & Feel
- Soft Touch Buttons
- LED Height and System Information Display
- Up to 3 Memory Positions
- Responsive Up / Down Function
- Under-desk Mounting




Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 5300 Broadmoor Ave SE,
Suite D, Grand Rapids, MI 49512, USA, office.na@logicdata.net

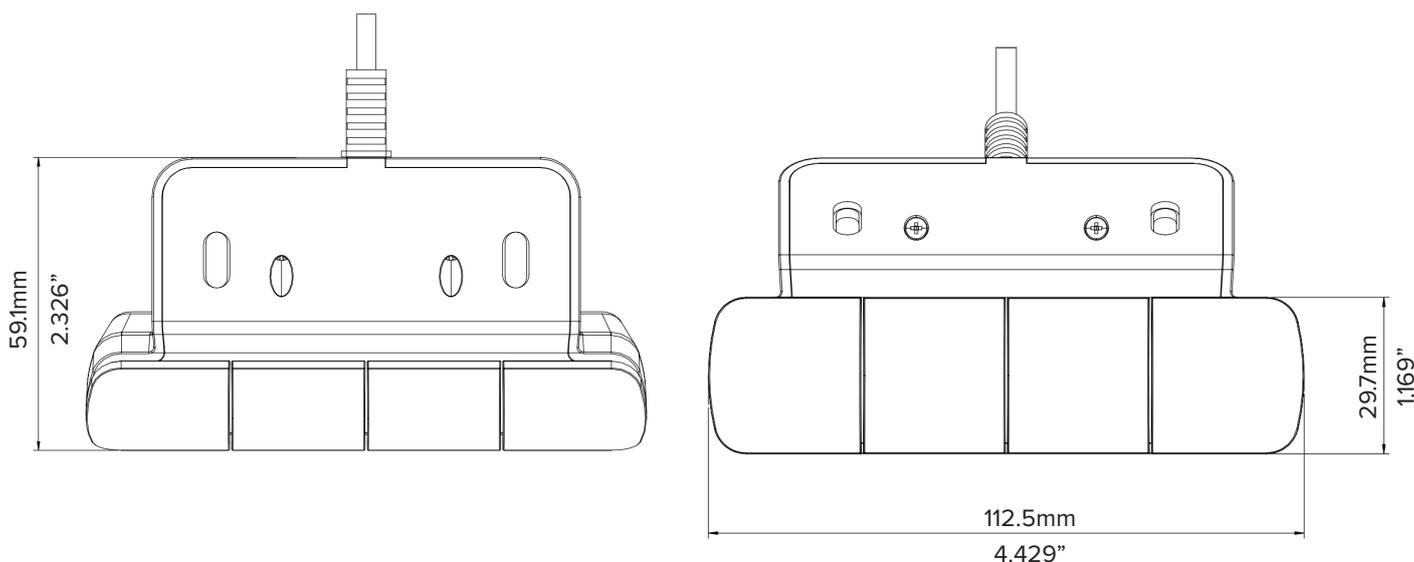

TECHNICAL DATA

Supply voltage	5 V DC $\pm 10\%$
Current Consumption (average)	15 mA
Current Consumption (standby)	<0.1 mA
Cable length	1800 mm
Dimensions (l x w x h)	59.1 x 112.5 x 29.7 mm / 2.326" x 4.429" x 1.169"
Ambient conditions during operation	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
Ambient conditions during transport and storage	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to +60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
Compatibility	All LOGICDATA Control Boxes, except integrated Control Units in the LOGICdrive and DYNAMIC MOTION families.
Degree of protection (IEC 60529)	IP 20
Standards and regulations	RoHS directive 2011/65/EU
Order Code	CBIsolid-C-y-z

Reserved, standard is blank
 Customer Code, up to 3 characters, standard is "LD"