



# LOGICflex C

## The Flexible Solution

## DESCRIPTION

The LOGICflex C is the ideal choice for future proof flexible workspaces. It is not only a height-adjustable desk but can also be used as whiteboard when flipped or easily stored away. Equipped with newest power management, this product can be operated with any USB-PD source you may already have.

## FEATURES

- Flip Table and Whiteboard function
- USB-PD compatible
- Inline brushless actuator technology
- Plug & Play
- Simple & Fast set up
- European Technology


### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office@logicdata.net](mailto:office@logicdata.net)

### North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,  
Cedar Springs, MI 49319, USA, [support.na@logicdata.net](mailto:support.na@logicdata.net)



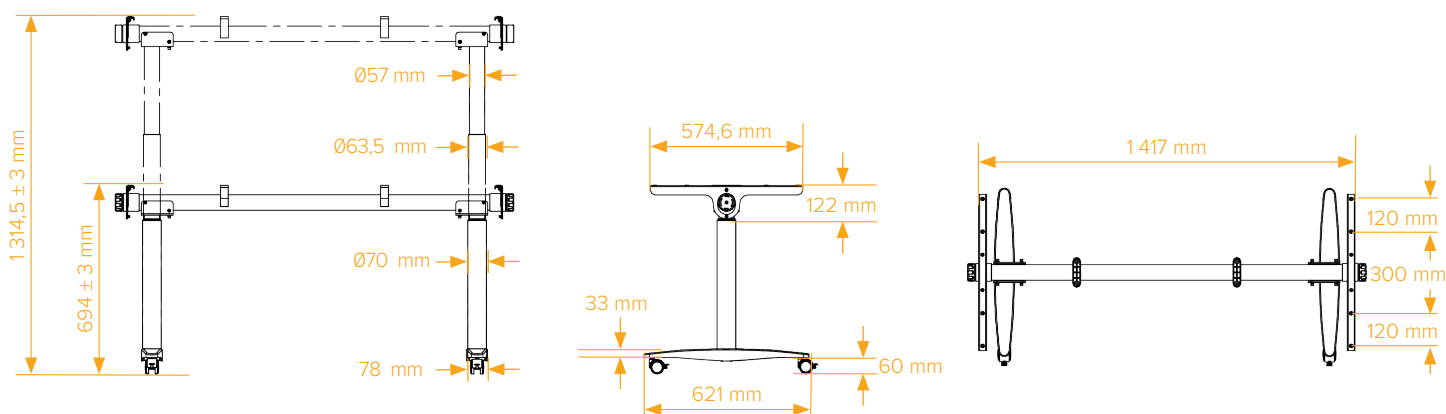

## TECHNICAL DATA

|                                                        |                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tabletop Size</b>                                   | Standard size: 160 x 80 cm                                                                                                                                                                                                                                                                                                               |
| <b>Travel Range (without tabletop)</b>                 | 69 - 131 cm                                                                                                                                                                                                                                                                                                                              |
| <b>Stroke</b>                                          | 620 mm                                                                                                                                                                                                                                                                                                                                   |
| <b>Adjustment Speed</b>                                | Up to 60 mm/s                                                                                                                                                                                                                                                                                                                            |
| <b>Lifting Capacity (without tabletop)</b>             | Up to 80 kg                                                                                                                                                                                                                                                                                                                              |
| <b>Power Management</b>                                | DYNAMIC MOTION Power Supplies / DMbridge-PD (USB-PD with min. 140 W input)                                                                                                                                                                                                                                                               |
| <b>Duty Cycle</b>                                      | 2 min. ON / 18 min. OFF                                                                                                                                                                                                                                                                                                                  |
| <b>Weight (complete system)</b>                        | 57 kg                                                                                                                                                                                                                                                                                                                                    |
| <b>Available Colors</b>                                | Black non-structured, White non-structured, Silver non-structured                                                                                                                                                                                                                                                                        |
| <b>Ambient Conditions During Operation</b>             | +5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2000 m.                                                                                                                                                                                                                                         |
| <b>Ambient Conditions During Transport and Storage</b> | Temperature between -35 °C and +80 °C<br>Temperature over 50 °C only for periods not exceeding 72h.<br>Maximum relative humidity between 95% and 5% (lower allowed)                                                                                                                                                                      |
| <b>Applied Standards</b>                               | EN ISO 12100:2010   EN ISO 13854:2020   EN 527-1:2011 + A1:2019   EN 527-2:2016   EN 61000-6-1:2007   EN 61000-6-3:2021   RoHS Directive 2011/65/EU (+ 2015/863)   REACH EC 1907/2006 (including formaldehyde under Regulation (EU) 2023/1464)                                                                                           |
| <b>Order Code</b>                                      | LOGICflex - C - BB - CCC - DDD - oo<br><div style="display: flex; align-items: center; margin-top: 10px;"> <div style="border-left: 1px dashed orange; width: 100px; height: 100px; margin-right: 10px;"></div> <div> <p>Special specification</p> <p>Customer</p> <p>Color definition</p> <p>Market</p> <p>Frame type</p> </div> </div> |