



LOGICflex M

The Little Maestro

DESCRIPTION

The LOGICflex M is the perfect solution for dynamic and flexible workspaces. As a sleek height-adjustable monoleg table, it offers maximum versatility in compact spaces. Powered by the DMbridge-PD, it seamlessly connects to modern USB-PD sources and is compatible with all columns from the LOGICleg portfolio, making it ideal for mobile and future-proof office environments.

FEATURES


- USB-PD compatible
- Inline brushless actuator technology
- Plug & Play
- Simple & Fast set up
- Mobility with casters
- All-In-One Box Packaging
- European Technology

Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office@logicdata.net

North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,
Cedar Springs, MI 49319, USA, support.na@logicdata.net

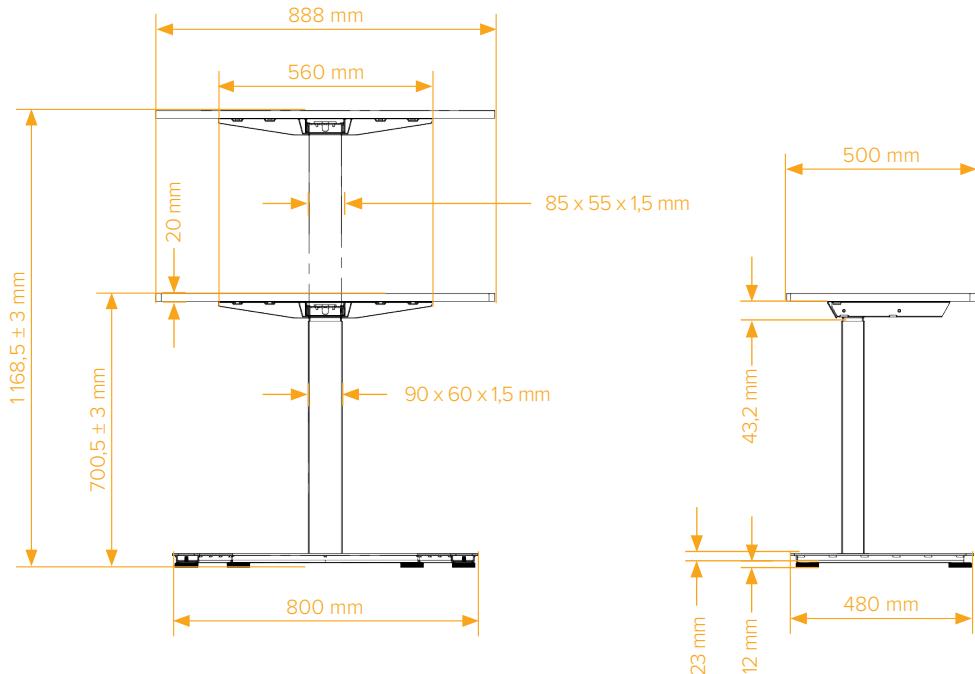

TECHNICAL DATA

Tabletop Size	Standard size: 90 x 60 cm
Travel Range (tabletop)	70 - 117 cm
Stroke	468 mm
Adjustment Speed	Up to 45 mm/s
Lifting Capacity (without tabletop)	Up to 50 kg
Power Management	DYNAMIC MOTION Power Supplies / DMbridge-PD (USB-PD)
Duty Cycle	2 min. ON / 18 min. OFF
Weight (complete system)	25 kg
Available Colors	Black non-structured, White non-structured, Silver non-structured
Ambient Conditions During Operation	+5 °C to +30 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2000 m.
Ambient Conditions During Transport and Storage	Temperature between -35 °C and +80 °C Temperature over 50 °C only for periods not exceeding 72h. Maximum relative humidity between 95% and 5% (lower allowed)
Applied Standards	EN ISO 12100:2010 EN ISO 13854:2020 EN 527-1:2011 + A1:2019 EN 527-2:2016 EN 61000-6-1:2007 EN 61000-6-3:2021 RoHS Directive 2011/65/EU (+ 2015/863) REACH EC 1907/2006 (including formaldehyde under Regulation (EU) 2023/1464)
Order Code	LOGICflex - M - BB - CCC - DDD - oo
	<p>Special specification Customer Color definition Market Frame type</p>